




The vital component

Toby Electronics Ltd , Beaumont Road Industrial Estate, Banbury , Oxon OX16 1TU ,  
 England, Tel UK +44 (0) 1295 271777, Fax UK +44 (0) 1295 271744, [Sales@toby.co.uk](mailto:Sales@toby.co.uk)

**MB532-500M**

Pitch: 5.00mm(0.197inch)




- **Description :**
- Pitch : 5.00 mm (0.197 inch)




SPECIFICATIONS			CUL	VDE
負載電壓	Rated Voltage	Bemessungsspannung		
負載電流	Rated Current	Bemessungsstrom		
電線線徑	Wire Size	Leitergrößen	24~12AWG	0.2~4mm <sup>2</sup>
塑膠本體	Housing Material	Isolierstofftyp	Polyamide66(UL94V-0)	
押線圈	Cage Clamp	Klemmkörper	Brass, Ni plated	
端子	Terminal	Stiftmaterial	Brass, Tin plated	
螺絲	Screw Size	Schraubengewinde	M2.6, steel, Zinc plated	
操作溫度	Operating Temperature	Umgebungstemperatur	-40°C to + 105°C	
扭力	Torque	Anzugsmoment	5.0 lb-inch	
PC板孔徑	PCB Hole Diameter	Lochdurchmesser	ø 1.5mm	

TABLE

Item No.	A(mm)	A(inch)
MB532-500MA06	15.2	0.600
MB532-500MA09	20.3	0.800

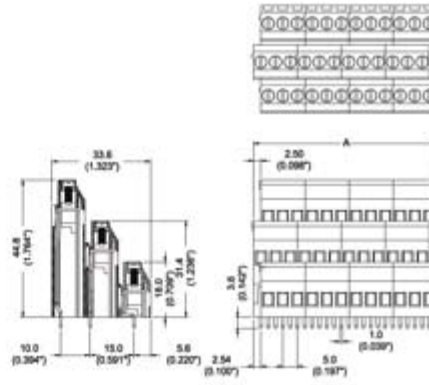

PCB Layout



Note:  
Screw Plating: Changes are available upon request